



19436515

INSTALLATION MANUAL



Thank you for purchasing an EchoMaster Product


WHAT'S INCLUDED:



1. Mirror Monitor
2. Mirror Hardware Pack
3. 16-pin Main Power Harness
4. Adapter Harness
5. 10-pin Main Power Harness



TOOLS NEEDED:

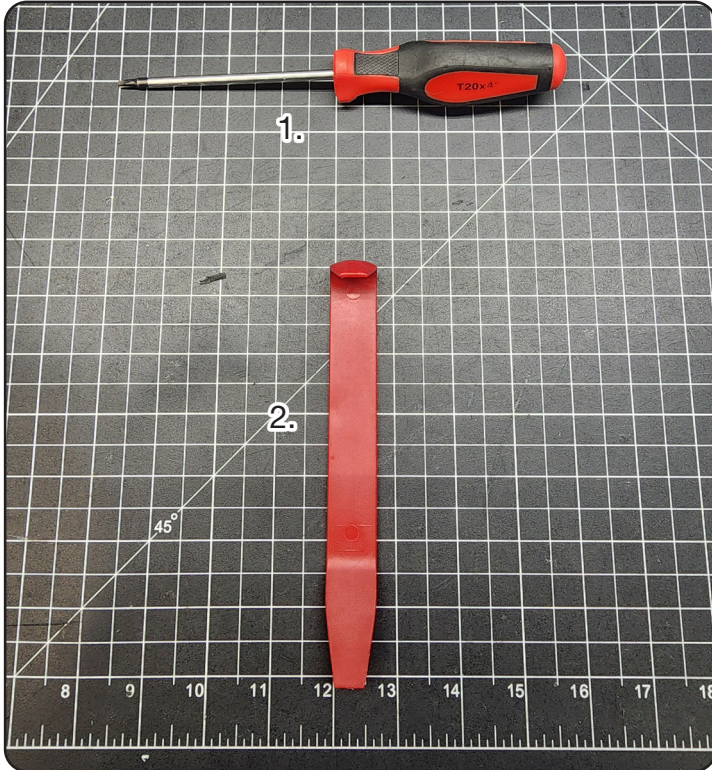

1. T20 Hand Driver

2. Panel Removal Tool

INSTALLATION GUIDE

Overview



STEP 1:

Remove the factory mirror by unscrewing the T20 Torx mounting screw and slide the mirror off of the rearview mirror button, then disconnect the factory wiring harness.




Illustrations are typical and may not match exact vehicle detail



STEP 2:

The vehicle will have the possibility of having 2 different harnesses. When the vehicle is equipped with the forward collision camera it will use the harness with the 10 pin connector, otherwise it will use the harness with the 16 pin connector. Determine which main power harness to connect to the factory mirror harness and set the other aside.

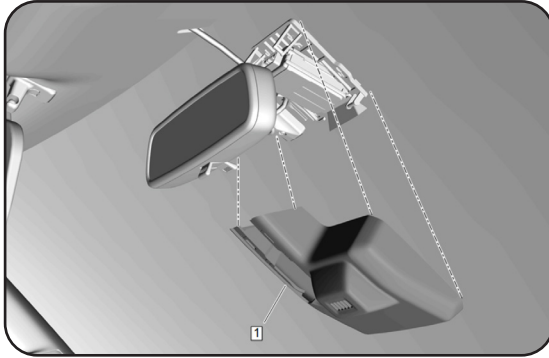

STEP 3:

Connect the factory connector to the appropriate harness and tuck the factory mirror harness and the main power harness up into the headliner leaving enough length to connect to the back of the new mirror monitor.



Illustrations are typical and may not match exact vehicle detail

STEP 4:

Connect the 12-pin white connector to the back of the mirror monitor then slide the mirror mount back onto the rearview mirror button. You may need to loosen the T20 mounting screw to get the new mirror to seat onto the rearview mirror button. Finally, secure the mount in place by screwing in the T20 Torx screw.

NOTE: Take caution not to overtighten the screw. Factory torque spec is 2Nm (18lb/in).



STEP 5:

Locate the 8-pin black connector under the drivers seat on the side of the underseat fuse box and disconnect the factory connection. Secure any excess harness to the factory wiring using a wire tie.



Illustrations are typical and may not match exact vehicle detail



STEP 6:

Next, take the adapter and connect it inline with the factory 8-pin connectors.



STEP 7:

Finally, turn the vehicles ignition to the “ON” position and ensure that the factory camera image appears on the mirror monitor when the vehicle is placed into reverse. Also, ensure that the camera image turns off when the vehicle is taken out of reverse. The camera image can be turned on at any time by pressing and releasing the power button at the bottom of the mirror.



Illustrations are typical and may not match exact vehicle detail



Phone – 866-766-2267

E-Mail – gmsupport@stingersolutions.com

Stinger

EchoMaster is a Power Brand of Stinger

EchoMaster.com

REV. DC041724