

CAM-LF3



Full Frame License Plate
Reverse Camera
User Manual



EchoMaster.com
EchoMaster is a Power Brand of AAMP Global



15500 Lightwave Drive, Suite 202
Clearwater, Florida 38760
email - support@aampglobal.com (US)
email - technical.eu@aampglobal.com (Europe)



Introduction

Thank you for purchasing your EchoMaster automotive camera.

The following part numbers are supported:
▶ CAM-LF3B-N ▶ CAM-LF3C-N

EchoMaster cameras are designed to improve safety during driving by providing high quality images of surrounding areas and obstacles in the vicinity of the vehicle. They will also improve vehicle maneuvering capability by displaying blind spots not normally visible to the driver.

Please ensure you read and understand all aspects of this manual before fitting or using your EchoMaster Camera. Choose a suitable mounting place dependent on the application. Ensure that there are no wiring harnesses or hoses/pipes located behind this panel before drilling.


Key Features

- ▶ 1/3" CMOS Sensor
- ▶ Operates at 0.3 LUX
- ▶ IP67 Rated
- ▶ 175 Degree Viewing Angle

Box Contents

- ▶ Camera
- ▶ Manual
- ▶ Wiring Harness
- ▶ Mounting Hardware

Dimensions

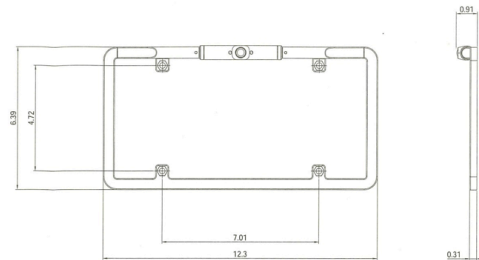

Specifications

	CAM-LF3B-N / CAM-LF3C-N
Sensor	1/3" CCD
LEDs	0
Illumination	0.3 LUX
Viewing Angle	175 degrees
Mirror Image	YES
Normal Image	NO
Water/Debris-Proof	IP67
Audio	NO
Power Supply	7-12V DC
Current	<70mA
Working Temperature	-20°C - +50°C
Dimensions (mm)	D (27) x W (330) x H (160)
System	NTSC
TV Lines	380
Resolution (HxV)	510 X 492

Wiring Diagram & Pin Out

